



DE GUZMAN & CO.

QUICK START GUIDE

SETTING THE TIME AND DATE




Water resistance is ensured **ONLY** when the crown is in locked position (screwed-in)



HANDWINDING
Position 1 is right after unscrewing the crown. This allows handwinding of the automatic movement



DATE SETTING
Position 2 is when the crown is pulled **ONCE**. This allows setting of the date



TIME SETTING
Position 3 is when the crown is pulled **TWICE**. This allows setting of the time.

WARNING:
Do not set the date between 9:00 pm and 3:00 am to prevent damage to the movement mechanism

ADJUSTING THE BRACELET




BRACELET ADJUSTMENT
Bracelet adjustments can be done using a screwdriver through the screw links found at the side of each bracelet link.

For a finer adjustment, use the adjustment pins on the side of the clasp

WARNING:
Do not overtighten the screw links to prevent stripping.

DG005: Use a 1.0mm screwdriver
DG008: Use a 0.8mm screwdriver

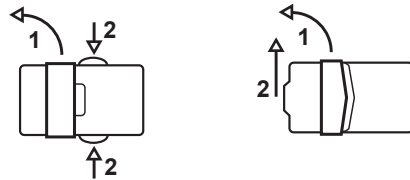

USE OF CLASP
DG005

- 1: Flip open the flip-lock keeper
- 2: Press both buttons to release the clasp

DG008

- 1: Flip open the flip-lock keeper
- 2: Pull on the indent upward to release the clasp