




DE GUZMAN & CO.

QUICK START GUIDE

DG013 (Seiko Instruments Inc. NH05A)

SETTING THE TIME AND DATE



HANDWINDING
The Pushed-in position allows for handwinding of the automatic movement

Water resistance is ensured when the crown is in Pushed-in position (Pushed-in)

*DG013 is not rated for high-impact water activities and is only rated to 5ATM water resistance.




DATE SETTING
Position 1 is when the crown is pulled ONCE. This allows setting of the date

WARNING:
Do not set the date between 9:00 pm and 3:00 am to prevent damage to the movement mechanism




TIME SETTING
Position 2 is when the crown is pulled TWICE. This allows setting of the time.

ADJUSTING THE BRACELET

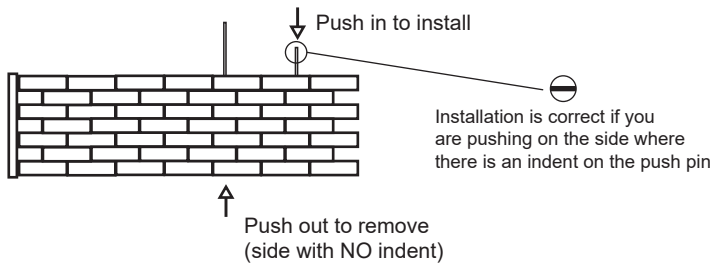

BRACELET ADJUSTMENT
Bracelets are fixed using a push-pin mechanism. Use a Push pin tool to remove the pins from the bracelet and remove links as necessary. Install links with the indent side going in last to lock the bracelet link.

*recommended to bring to a watchmaker for proper resizing

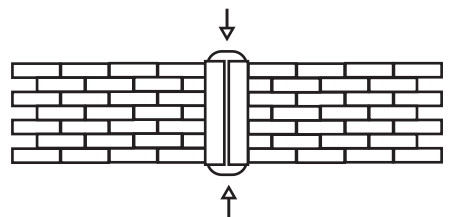

CLASP OPERATION
The DG013 uses a hidden clasp and can be unlocked by pressing the two buttons on where the two ends of the bracelet meet.